

Avenida de Roma, 18-26
08290 Cerdanyola del Vallès
Barcelona (Spain)



www.polylux.com/en
Tel : +34 93 594 65 41
export@polylux.com

firmapost@elteco.no




TTW12.5_DYdy12In



TTW_DYdy - Three phase isolation transformer IP23

Rating (kVA)	12,5 kVA	Effekt
Input Voltage	230V (D) - 400V (YN)	Inngangsspenning
Output Voltage	230V (d) - 400V (yn)	Utgangsspenning
Frequency	50/60Hz	Frekvens
Connection group	Yyn0 – Dyn11 – YNd5 – Dd0 (selectable)	Tilkoblingsgruppe
No load current	< 5% x In	Tomgangsstrøm
No load losses (W)	190 W	Tomgangstap
Load losses (W)	230 W	Last tap
Efficiency ≥	≥ 96,7 %	Effektivitet
Ambient temperature	40°C	Omgivelsestemperatur
Protection degree	IP23/IK08	Beskyttelsesgrad
Cover	Metal enclosure (epoxy polyester painted, RAL 7035)	Kapsling
	cat. C3 - ISO12994-2	
Cooling	ANAN	Kjøling
Noise level (dB)	< 45 dB	Støynivå
Tempearture rise	Class F	Tempearturklasse
Insulation	Class F	Isolasjon
Windings	Class HC – 200°C	Viklinger
Protection	Safety class I	Beskyttelse
Test voltage	3kV (1min, 50Hz)	Testspenning
Standards	IEC-EN 61558, CE	Standarder
Other information:		Annen informasjon:
	Inrush <	12 x In
	Ek =	2 %
	Ex =	1,8 %
	Er =	0,9 %
Width A (mm)	525	Bredde A (mm)
Deep B (mm)	415	Dyp B (mm)
Height C (mm)	645	Høyde C (mm)
Installation : fixing		Installasjon
D (mm)	375	D (mm)
E (mm)	350	E (mm)
Ø (mm)	12	Ø (mm)
Weight (kg)	106	Vekt (kg)
More info & check availability :	https://www.elteco.no/3-fase-spenningstrafoer	Mer info og sjekk tilgjengelighet:

A large, industrial-grade stainless steel refrigerator with two doors and a top-mounted condenser coil. The unit is designed for commercial use, featuring a sturdy construction and a clean, professional appearance.

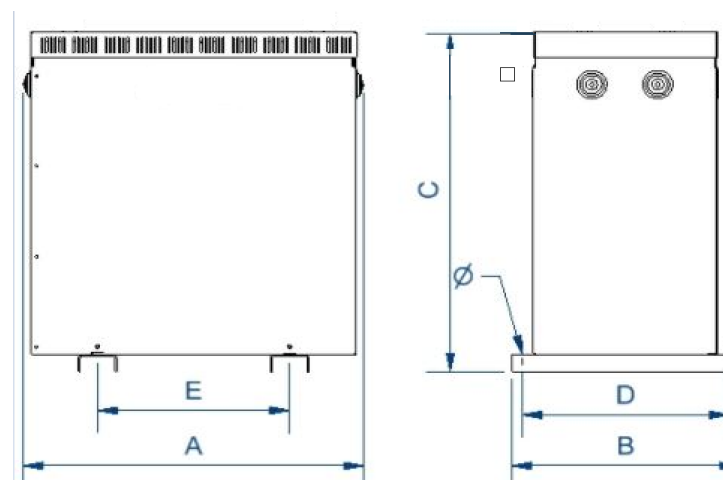

Remark: The dimensions stated at this quotation are approximated and can be modified without previous notification.
 Polylux does not accept returns of custom-made products once delivered or cancellation once manufactured
 Do not hesitate to contact us for any additional information required